



LHS-LED Linear Highbay



Introducing the LHS-LED,
Small in Size, **Big in Performance.**



Toolless Optic Swap

This leading edge technology enables contractors to swap from wide to narrow beam in the field. Allowing you to **choose the right optics in the field without any tools in under 60 seconds.**



Contractor Friendly

A small, lightweight footprint and easy installation with pre-installed 10ft cord, 6 ft suspension chain allow for one-man easy installation.



Better Performance

Provides higher efficacy and significant energy savings while delivering premium optical performance with glare-free lens and even illumination. The die-cast aluminum housing ensures optimal heat dissipation allowing for operation at a higher ambient temperature. LHS family offers universal features, consolidating 15+ SKUs into only 3 for efficient stocking.



Affordable



Changeable
Distribution



Adjustable
Lumens



Selectable Colour
Temperature



Compact
Design



Universal
Voltage



Easy
Install



Multiple
Mounting Options

Features & Benefits:




Twistlock Motion Sensor
20' & 40' mounting height PIR sensor &
50' mounting height Microwave sensor


Die-cast Aluminum housing
Compact size and lightweight
Ideal for stocking and easy installation
Up to 55°C ambient temperature

6' Suspension Chain - Standard
10' power cord - Pre-installed

90°x90° Wide Beam (installed)
45°x90° Narrow Beam (included in the box)
- Toolless Change in the Field

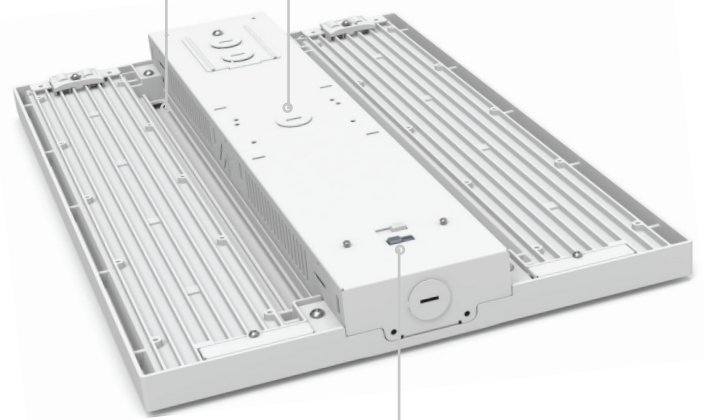


Wattage & Lumen Select switches

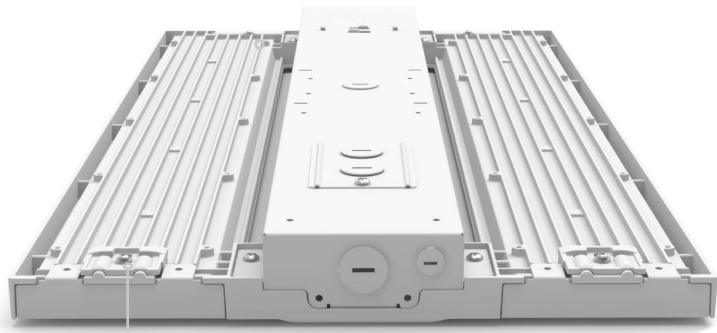

Toolless Optic Swap



Accessories



6' Suspension Chain
A pair of V-hooks



10' Aircraft Cable



Pendant Mount



Surface Mount



Wire Guard



120-347V
Emergency Back Up



Motion Sensor



Remote

Contact Your RAB Design Lighting Sales Rep Today!